


NEW PRODUCT


- High power 7W LEDs for exceptional performance
- With additional wiring for Daytime Running Light (DRL)
- Hard-coated polycarbonate lens offers ultimate protection against damage from impact and roadside debris
- Aluminum housing designed with perfect heat management for long-lasting performance
- Complies with DOT and FMVSS108 standards
- H4, 3-Blade wiring connector
- POWER SAVE 30%










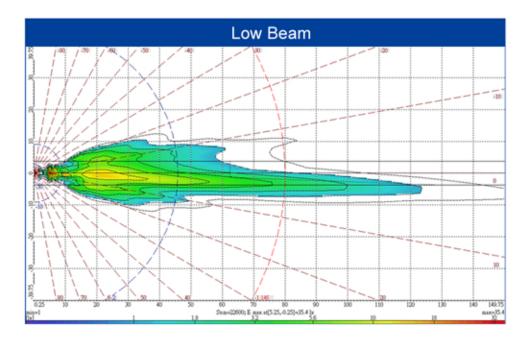

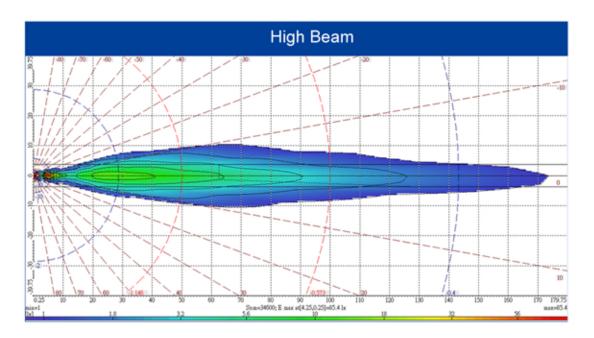

							Sto	d pack qty: 10	
Part No.	Voltage	Beam	Watt	Raw Lumen	Effective Lumen	Current Draw Weight		Weight	
22884-L	9~33V	Low	25	1260	882	12.8V at 1.8±0.	±0.05A		
		DRL	9	1080	756	12.8V at 0.778±0.08A 28V at 0.27±0.025A		849g	
22884-H	9~33V	High	25	1260	882	12.8V at 1.8±0.2A 28V at 0.8±0.05A			
		DRL	9	1080	756	12.8V at 0.778±0.08A 28V at 0.27±0.025A			
Material					Resistant				
lens		housing		dust	shock	warpage	temperature		
PC		aluminum		✓	✓	✓	-30°C~	50℃	